


INSTALLATION INSTRUCTIONS

DOOR HANDLE

單邊玻璃門把安裝說明

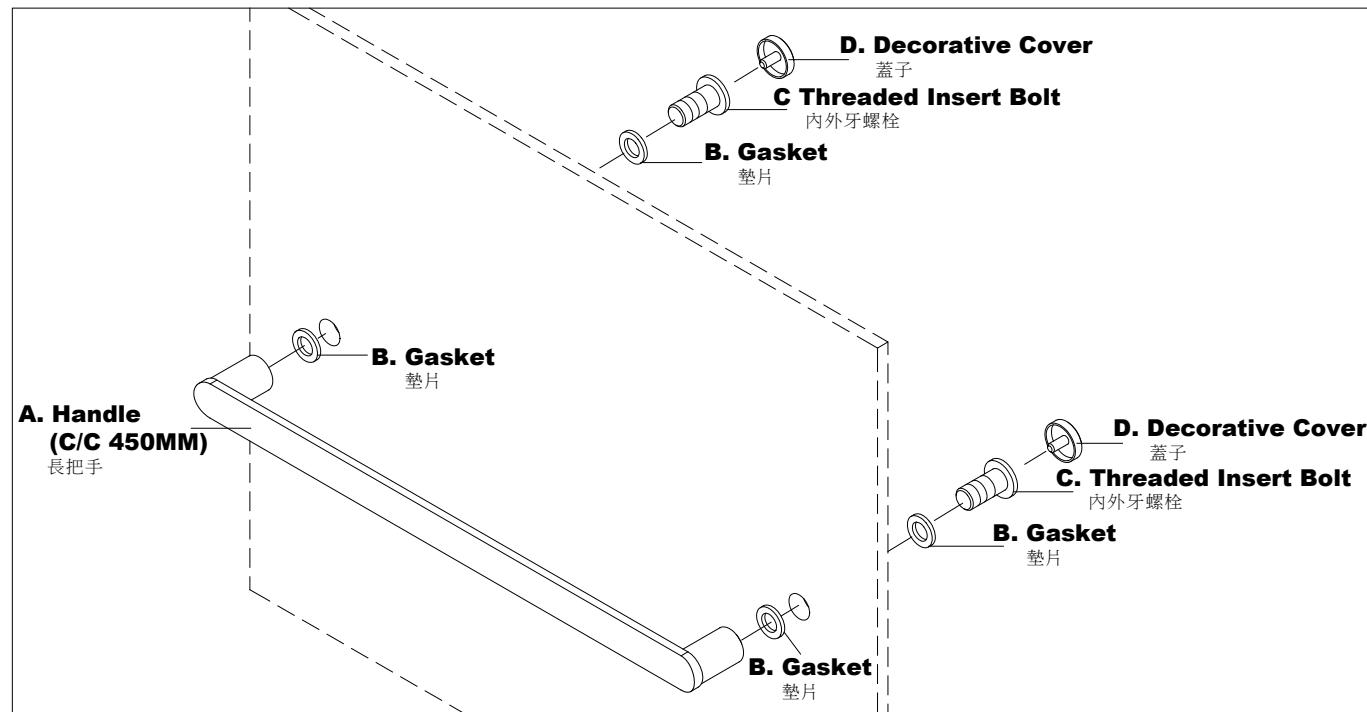

△ NOTICE 1. Available size of mounting holes is O/D15mm; available thickness of glass door is 8~20mm.
注意 1. 玻璃門適用鑽孔孔徑15mm; 厚度8~20mm

NOTICE 2. Place all the **Gaskets** between glass door and metal parts.

注意 2. 請注意將所有墊片分別置於玻璃門與金屬件的中間。

1. Disassemble the parts as figure shows.

將整組零件拆開。

2. Fix **Handle** with **Threaded Insert Bolt** from the other side securely (by 8.0 Hex. Key), and then screw **Decorative Cover** on the **Threaded Insert Bolt**.

將把手以內外牙螺栓從另一面鎖緊(可使用HEX8.0 六角扳手)，然後將裝飾蓋鎖入內外牙螺栓。

FIXING CONTENTS

組配件內容

